L-BILP - L-BILPA

PRICE COMPUTING RETAIL SCALE

CE-M certificate: 2014/31/EU, EN 45501, OIML R76 class III, legal for trade use with CE marking and conformity assessment (initial verification).



L-BILP





L-BILPA

CAPACITY kg	DIVISION (g)	NET WEIGHT (kg)	CODE	NET WEIGHT (kg)	CODE
3/6	e=1/2	3.3	L-BILP6	4.5	L-BILPA6
6/15	e=2/5	3.3	L-BILP15	4.5	L-BILPA15
15/30	e=5/10	3.3	L-BILP30	4.5	L-BILPA30

DESCRIPTION

- Stainless steel plate.
- RS232 output for connection to external printer.
- Backlit LCD displays on both sides, 3x 6-digit (20 mm height).
- 20-key waterproof keyboard.
- Bubble level and adjustable feet.
- 6 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- Power supply included.
- Auto power-off.

MAIN FUNCTIONS

- Simultaneous display of: weight, unit price, amount.
- 100 storable items (PLU) with unit price.
- Price unit setting: €/kg - €/100 g.
- Automatic cancellation of price and tare.
- Totalization of partial amounts.
- Automatic change calculation.
- Optional non-fiscal receipt printing via STAVT II external printer: customizable header, date, time, net weight, unit price, amount per item, total amount.

DIMENSIONS (mm)

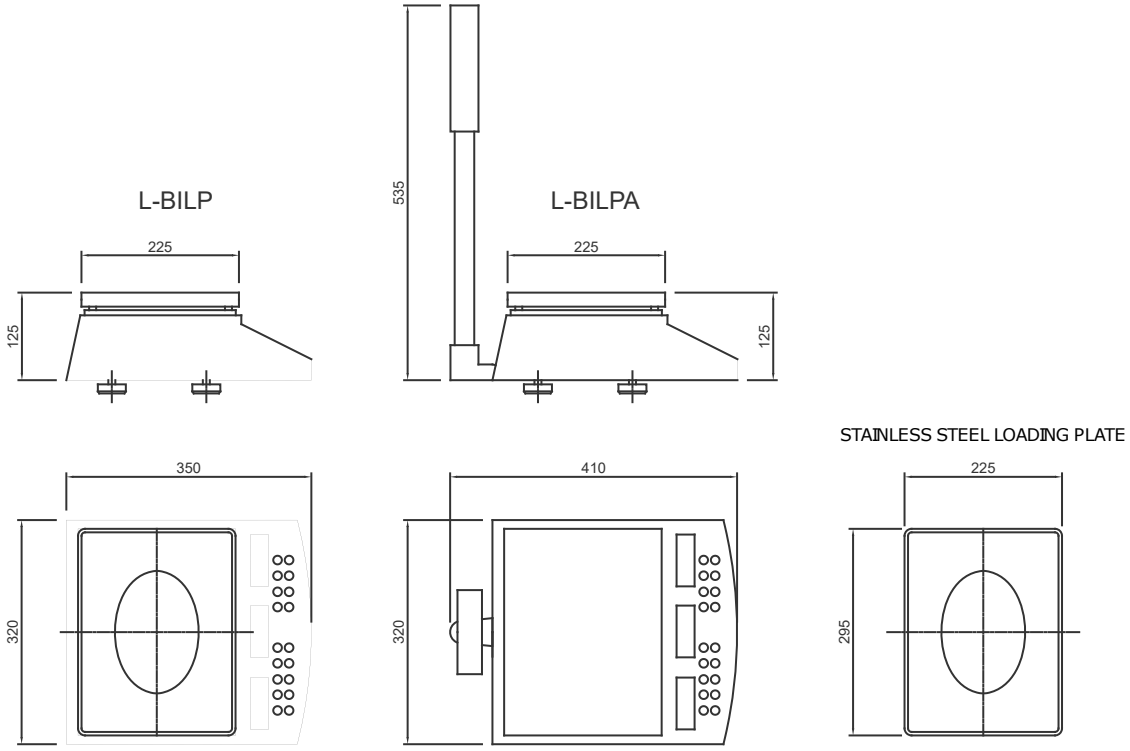

TECHNICAL FEATURES

Power supply	230 VAC ±10%
Internal battery	6 V, 4 Ah capacity
Linearity	<0.01% full scale
Display resolution	3000
Units of measure	kg
Serial port	RS232
Baud rate	2400, 4800, 9600, 19200 (bit/s)
Humidity (condensate free)	<85%
Storage temperature	-10 °C +50 °C
Working temperature	-10 °C +40 °C

OPTIONS ON REQUEST

	DESCRIPTION	CODE
	Stainless steel deep tray. Dimensions: 230x300x40 mm.	L-PIATTOBAC
	Panasonic rechargeable battery mod. LC-R064R5P - 6 V, 4.5 Ah capacity.	L-BATTERIA6V4AH
	Desktop thermal printer.	L-STAVTII

The Company reserves the right to make changes to the technical data, drawings and images without notice.