L-PM

ULTRA-LIGHT ALUMINUM PLATFORM - 4 LOAD CELLS IP68

IP68 IP69K

Capacity 1000 kg



- Ultra-light anodized aluminum platform.
- Integrated ramps and sideguards.
- 4 load cells L-FTP 500 kg
  AISI 420 stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Galvanized steel adjustable feet, self-centering on sphere.
- Carrying handles and wheels.



CAPACITY	kg	ACCURACY CLASS C3		DIMENSION (mm)	WEIGHT (kg)	CODE
	1000	•	•	1200 x 1600	55	L-PM1000
			ON REQUEST			

CERTIFICATIONS

OIML R60 C3

CERTIFICATIONS ON REQUEST

Declaration of conformity + IP69K marking protection rating
Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)

ATEX II 2GD *(zone 1-2-21-22)*

IECEx *(zone 1-2-21-22)*

DIMENSIONS (mm)

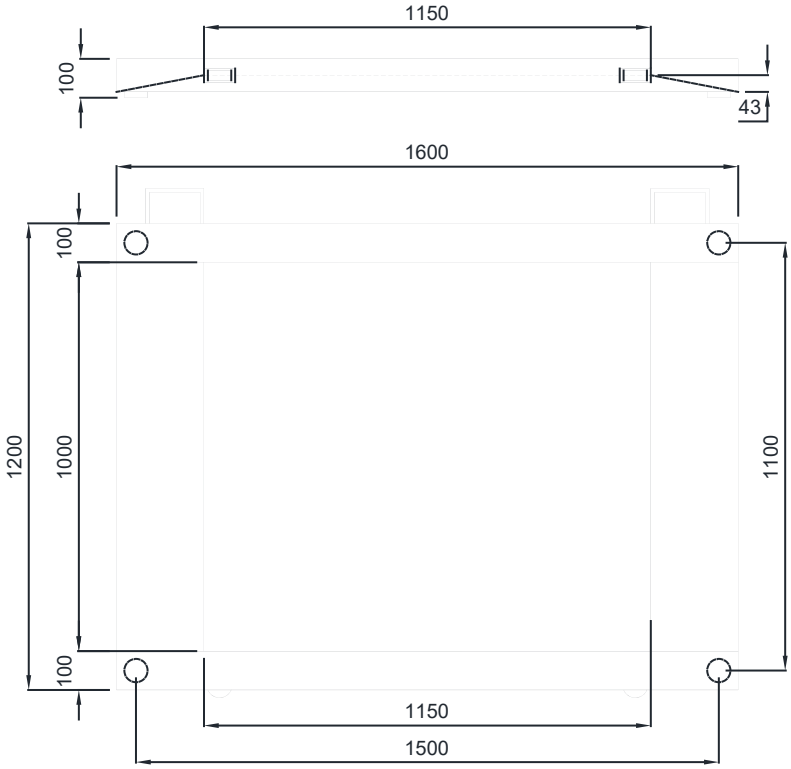

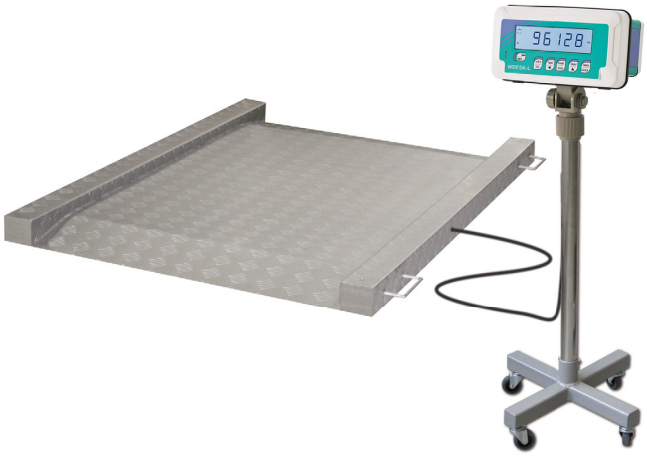

ELECTRICAL CONNECTIONS



SHIELD	
+ SIGNAL	GREEN
+ EXCITATION + REF./SENSE	RED BLUE
- SIGNAL	WHITE
- EXCITATION - REF./SENSE	BLACK YELLOW

OPTIONS ON REQUEST

	DESCRIPTION	CODE
	Stainless steel indicator-holder column (Ø38 mm, height 700 mm). Painted steel mobile pedestal.	L-COLONNAM + L-MOBILCOLONNA L-COLONNAM + L-MOBILCOLONNAINOX
	Non-standard capabilities.	

The Company reserves the right to make changes to the technical data, drawings and images without notice.