Magnet holder



Important properties:

- Direct measurement of surface elongation
- Quick and non-destructive assembly using various assembly devices
- Individual assembly devices possible according to customer requirements
- Reuseable
- High accuracy and linearity in tension/compression
- Dynamic applications
- Without amplifier (passive)

| Technical data | | |
|--|------|------------------------------|
| | | |
| StrainPad construction | | 0.4 |
| Measuring grid length | mm | 0,6 |
| Direction | | Uniaxial |
| Measuring grid material | | Konstantan |
| Capsule material | | Polyimid |
| Outer diameter | mm | 10 |
| Height | mm | 0,2 |
| Connections | | Solder pads |
| Housing material of mounting solutions | | Aluminium |
| Electrical properties | | |
| Bridge resistance | Ω | 120 |
| Resistance tolerance | % | ± 0,3 |
| K-Factor | | 1,9 |
| K-Factor-tolerance | % | ± 3 |
| Cross sensitivity | % | -0,1 |
| Recommended bridge voltage | V | 1 |
| Max. bridge voltage | V | 10 |
| Tomporeture preparties | | |
| Temperature properties | °C | 23 |
| Reference temperature | | |
| Usage temperature | °C | 060 |
| Possible temperature adjustment | 1/K | 10,8E-6 ferritic steel |
| Installation conditions | | |
| Contact pressure | Ν | 100300 |
| Smallest radius of curvature | mm | 3 |
| Setting time | min | 15 |
| Measurement properties | | |
| Maximum elongation | μm/m | ±1000 |
| Accuracy | h | <± 0,5% from the final value |
| Overload capacity | | unlimited (offset can occur) |
| Achievable load changes at 300 µm/m | | omminiced (onset can occur) |

The magnet holder with it's StrainPad measures the surface expansion in the same quality as conventional strain gauges directly at the assembly point.

The magnet holder developed by octogon with it's StrainPad is pressed so strongly against the surface to be measured that frictional engagement is created.

The assembly of the sensor is non-destructive, very simple and carried out in seconds.

Further standard mounting devices can be found on our website. Please contact us for individual assembly devices specifically for your application.




octogon GmbH

Roseggerstraße 16, 8700 Leoben, Austria Phone: 0650 9881601

Website: https://www.octogon.org

Magnethalter

Dimension:

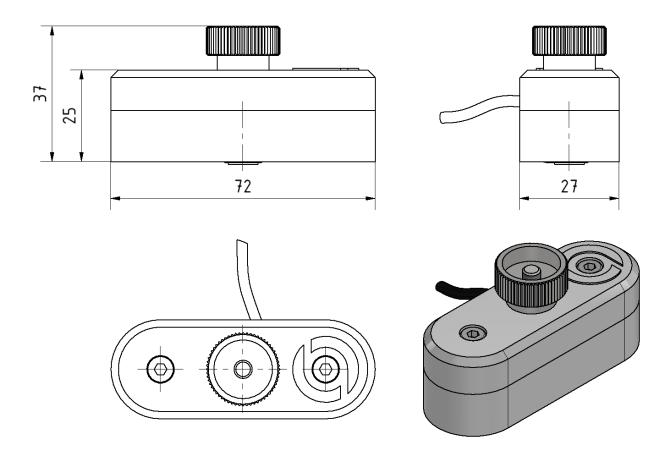

Magnet holder

Electric connection:

