

Foods

NEW

# FSA

fully automatic whole grain moisture analyser with integrated determination of hectolitre weight and infrared sample temperature measurement




78,0 °F | 6,16% | 456 kg/m<sup>3</sup> | -27,3 td | 0,64 aw | 51,9% r.H. | 14,8% abs | 100,4 g/m<sup>2</sup> | 09 m/s | 4,90 Ugl | 163 μm | 23,2 °C | 78,8 °F | 6,21% | 1424 kg

# FSA

## fully automatic grain moisture analyser

Calibrated for maize, rye, triticale, wheat, durum wheat, peeled and unpeeled buckwheat, peeled and unpeeled spelt, peeled and unpeeled millet, sorghum millet, barley, oats, rape, soybeans, horse beans, scarlet runner beans, sunflower seeds, pumpkin seeds, rice, field peas and linseed. Further products on request, also special products can be calibrated!

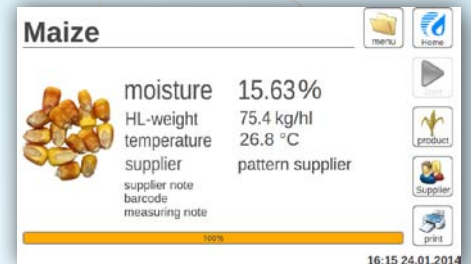

### Measuring procedure:

The right selection of the measured sort is essential to guarantee an accurate measuring result. For that, just select your product among the list of all calibrated sorts with pictures at the colour touch display. After that fill the sample to measure into the filling funnel of the device. The sample doesn't have to be grinded or treated in any way. By pressing the Start button, the measurement is effected fully automatically. After approx. 30 seconds the measurement is completed and the display shows the water content, hectolitre weight as well as the temperature of the material. Now additional information such as supplier, barcode or a note can be added. The measuring results can be stored on the device, an USB flash drive or in the network. Furthermore the measuring results can immediately be printed out via the integrated printer.

### Features:

- Measuring range 0 to max. 50% water content, depending on the product
- Resolution 0.01%
- Hectolitre measurement (kg/hl)
- Infrared sample temperature measurement
- Temperature can be set to °C or °F as required
- Automatic infrared temperature compensation
- Measurement within seconds without prior treatment of samples
- 7 inch colour touch display
- Integrated printer in a robust housing
- Datalog for up to 1,000,000 logs with measuring point report
- Suppliers data management
- Customer-specific calibration for special crops, granulate etc. possible
- Ethernet and USB data interface module
- Menu languages: English, German, Italian, French, Spanish, Portuguese and many others on request
- Very fast and accurate whole grain measurement
- Simple, convenient and quick handling via large touch display
- Official calibration in preparation
- Scope of supply: FSA, Ethernet and USB data interface module, integrated printer, measuring cup



Climate /  
Environment



Foods



Bioenergy



Material



Buildings



Paper / Board

### Schaller GmbH

Max-Schaller-Straße 99, A - 8181 St. Ruprecht an der Raab  
 Tel +43 (0)3178 - 28899 , Fax +43 (0)3178 - 28899 - 901  
 info@humimeter.com, www.humimeter.com

Any technical changes reserved. Pictures do not show possible changes that have been made on different models.

A wide range of other instruments and external sensors can be found at [www.humimeter.com](http://www.humimeter.com)